

## C4408R DETECTOR RELAY BASE


DFU0000409 Rev 1

## C4408DR DETECTOR RELAY BASE WITH DIODE

C4408R and C4408DR are compatible with ActiV conventional detectors. Remove the optional identification and security tags from the centre of the base and use as shown in steps 1, 2 & 4. See overleaf for wiring details.

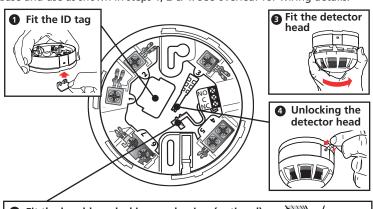



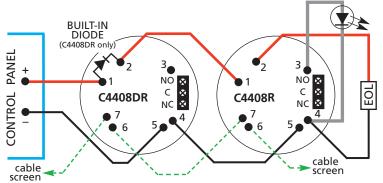

- Correct polarity must be observed.
- Do not mount bases on uneven surfaces.
- Terminals can accept 0.25-2.5 mm<sup>2</sup> wiring.
- Screened cables are recommended.

- 9 33 Vdc operating line voltage.
- Relay switches up to 1 A @ 24 Vdc and is controlled by detector's remote LED output.
- Optional connection to a BF318 Remote LED.
- Example uses: Door release, CCTV, etc.

BASE CONNECTION DETAILS	
Contact No.	Function
1	+Ve IN (diode connection on C4408DR only)
2	+Ve OUT (diode connection on C4408DR only)
3	Remote LED +Ve
4	0V
5	0V
6	Screen
7	Screen

